


# MULTI-PAIR STRANDED UNSHIELDED CSA/FT4/UL

**Conductor** Stranded tinned copper  
**Insulation** 600V Colour coded semi-rigid PVC  
**Jacket** Grey PVC  
**Temperature** -20°C to 105°C

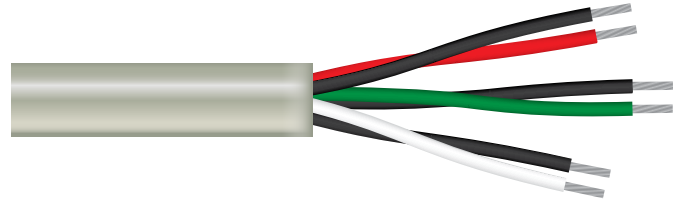

**Approvals** CSA Certified CMG/UL listed to CM harmonized standard C22.2 No.214 and UL 444.  
 Certified to CSA standard C22.2 No. 210.2 – Type AWM  
 Passes CSA/FT4 vertical flame test  
 Passes UL 70,000 BTU vertical flame test

**Applications** For use in PA systems, unbalanced intercom systems, interconnecting cables, remote control circuits, telephones and low voltage relay controls.

Product Code	AWG Size	# of Pairs	Stranding	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (lbs/mft)	Colour Code
35CB2202	22	2	7/30	0.008	0.023	0.202	20	3
35CB2204	22	4	7/30	0.008	0.023	0.236	33	3
35CB2209	22	9	7/30	0.008	0.030	0.331	69	3
35CB2212	22	12	7/30	0.008	0.030	0.364	89	3
35CB2219	22	19	7/30	0.008	0.030	0.438	133	3
35CB2227	22	27	7/30	0.008	0.032	0.530	187	3
35CB2002	20	2	7/28	0.009	0.023	0.235	27	3
35CB2004	20	4	7/28	0.009	0.023	0.276	47	3
35CB2012	20	12	7/28	0.009	0.030	0.428	130	3
35CB2015	20	15	7/28	0.009	0.032	0.470	160	3
35CB1802	18	2	16/30	0.012	0.023	0.285	38	3
35CB1804	18	4	16/30	0.012	0.030	0.351	71	3
35CB1806	18	6	16/30	0.012	0.030	0.402	101	3
35CB1812	18	12	16/30	0.012	0.032	0.530	189	3
35CB1815	18	15	16/30	0.012	0.050	0.614	252	3
35CB1603	16	3	26/30	0.015	0.030	0.386	84	3
35CB1606	16	6	26/30	0.015	0.032	0.497	156	3

