


FAS FIRE ALARM CABLE UNSHIELDED

- Conductor** Solid bare copper
- Insulation** 300V Colour coded PVC
- Jacket** Red PVC
- Temperature** -30°C bend to 105°C
- Packaging** X 75, X 150, X 300m Spools
- Approvals** CSA C22.2 No. 208 Type FAS FT4, SR (Sunlight Resistant)
- Applications** Fire alarm systems, heating, air conditioning and thermostat controls. For use in buildings in damp or dry locations. Power circuits in accordance with NEC article 725 Class 2 and 3 circuits. Suitable for tray cable installations.

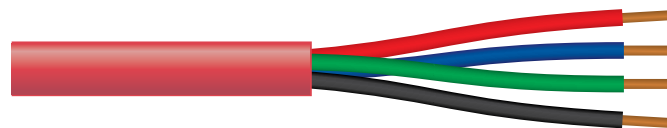

Product Code	Cond Size	# of Cond.	Cond. Strand	Nominal Insulation Thickness (inches)	Nominal Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (kgs/km)	Colour Code
39EA1802*	18	2	Solid	.015	.035	.138 x .212	34	92
39E1802	18	2	Solid	.015	.035	.212	37	92
39E1803	18	3	Solid	.015	.035	.223	48	92
39E1804	18	4	Solid	.015	.035	.242	60	92
39E1805	18	5	Solid	.015	.036	.263	71	92
39E1806	18	6	Solid	.015	.037	.289	84	92
39E1808	18	8	Solid	.015	.037	.312	108	92
39E1809	18	9	Solid	.015	.037	.334	120	92
39E1810	18	10	Solid	.015	.037	.362	131	92
39E1811	18	11	Solid	.015	.037	.362	143	92
39E1820	18	20	Solid	.015	.046	.466	253	92
39E1821	18	21	Solid	.015	.046	.475	268	92
39E1830	18	30	Solid	.015	.046	.556	364	92
39E1602	16	2	Solid	.015	.035	.232	48	92
39E1603	16	3	Solid	.015	.035	.245	64	92
39E1604	16	4	Solid	.015	.035	.266	81	92
39E1605	16	5	Solid	.015	.039	.294	99	92
39E1402	14	2	Solid	.015	.035	.258	66	92
39E1403	14	3	Solid	.015	.037	.277	91	92
39E1404	14	4	Solid	.015	.037	.302	116	92
39E1405	14	5	Solid	.015	.039	.329	140	92
39E1202	12	2	Solid	.015	.037	.296	94	92

* Parallel Conductors