


# MULTI-CONDUCTOR STRANDED FOIL SHIELD - PLENUM

CSA/FT6

- Conductor** Stranded tinned copper
- Insulation** 300V Colour coded flame retardant PVC
- Jacket** Grey PVC
- Temperature** 60°C
- Shields** Overall 100% aluminum foil with stranded tinned copper drain wire.
- Approvals** UL listed CMP to harmonized standard C22.2 No.214 and UL 444  
Passes CSA/FT6 flame and smoke test  
Passes UL 910 flame and smoke test
- Applications** Recording studios, broadcast sound systems and electronic circuits where RF shielding is required.

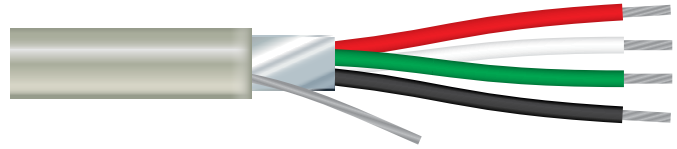


Product Code	AWG Size	# of Cond.	Strd	Drain Wire Size	Insulation Thickness (inches)	Jacket Thickness (inches)	Nom. O.D. (in.)	Nominal Cap (pF/ft)		Cable Wt (lbs/mft)	Colour Code
								A	B		
42EA2202	22	2	7/30	24	0.008	0.015	0.133	45	87	12	1
42EA2203	22	3	7/30	24	0.008	0.015	0.140	35	68	15	1
42EA2204	22	4	7/30	24	0.008	0.015	0.152	35	68	18	1
42EA2206	22	6	7/30	24	0.008	0.015	0.180	35	68	24	1
42EA2002	20	2	7/28	22	0.008	0.015	0.151	49	95	15	1
42EA1802	18	2	7/26	20	0.008	0.015	0.180	55	105	22	1
42EA1803	18	3	7/26	20	0.008	0.015	0.181	40	78	29	1
42EA1804	18	4	7/26	20	0.008	0.015	0.198	40	78	36	1
42EA1805	18	5	7/26	20	0.008	0.015	0.216	40	78	43	1
42EA1806	18	6	7/26	20	0.008	0.015	0.237	40	78	51	1
42EA1808	18	8	7/26	20	0.008	0.015	0.257	40	78	65	1
42EA1602	16	2	19/29	18	0.012	0.015	0.201	55	105	31	1
42EA1603	16	3	19/29	18	0.012	0.015	0.222	40	78	41	1

# MULTI-PAIR STRANDED FOIL SHIELD - PLENUM

CSA/FT6

- Conductor** Stranded tinned copper
- Insulation** 300V PVC insulation
- Jacket** Grey PVC
- Temperature** 60°C
- Shields** Overall 100% aluminum/polyester shield with stranded tinned copper drain wire.
- Approvals** UL listed CMP to harmonized standard C22.2 No.214 and UL 444  
Passes CSA/FT6 flame and smoke test  
Passes UL 910 flame and smoke test
- Applications** Low voltage applications, remote controls, computer system interface, communication and signal applications.

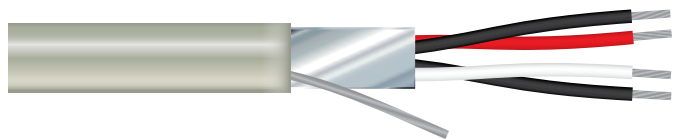

Product Code	AWG Size	# of Pairs	Strd	Drain Wire Size	Insulation Thickness (inches)	Jacket Thickness (inches)	Nom. O.D. (in.)	Nominal Cap (pF/ft)		Cable Wt (lbs/mft)	Colour Code
								A	B		
42GA2202	22	2	7/30	24	0.008	0.015	0.193	35	68	20	3
42GA2203	22	3	7/30	24	0.008	0.015	0.205	35	68	26	3

A – Conductor to conductor    B – 1 Conductor and other conductors connected to shield