


# SJ SERVICE CORD

- Conductor** Bare annealed copper ASTM B-174 flexible bunch strands
- Insulation** Colour Coded Synthetic rubber
- Jacket** Black thermoset
- Temperature** -40°C to +60°C
- Voltage** 300V
- Applications** Designed for use with portable tools, equipment and motors.
- Approvals** CSA C22.2 No. 49 FT1/FT2, UL-62, ROHS Compliant
- Packaging** 75m, 150m & 300m spools, Long length Reels cut to length.
- Colour Code** 2c - Black, White 3c - Black, White, Green 4c - Black, White, Red, Green  
\*Green Conductor used for grounding purposes only



Product Code	Cond. Size	# of Cond.	Cond. Strand	Nom. Insul. Thickness (Inches)	Nom. Jacket Thickness (Inches)	Nom. O.D. (Inches)	AMPS*	Ship. Weight lbs/mft
10A1802	18	2	16	0.03	0.03	0.28	10	46
10A1803	18	3	16	0.03	0.03	0.3	10	58
10A1804	18	4	16	0.03	0.03	0.325	7	76
10A1602	16	2	26	0.03	0.03	0.305	13	56
10A1603	16	3	26	0.03	0.03	0.325	13	78
10A1604	16	4	26	0.03	0.03	0.35	10	96
10A1402	14	2	41	0.03	0.03	0.335	18	76
10A1403	14	3	41	0.03	0.03	0.36	18	99
10A1404	14	4	41	0.03	0.03	0.39	15	121
10A1202	12	2	65	0.03	0.045	0.405	25	113
10A1203	12	3	65	0.03	0.045	0.425	25	142
10A1204	12	4	65	0.03	0.045	0.465	20	179

\*Ampacities (Amps per conductor) are based on 30°C ambient temperature in air, 90°C conductor temperature.

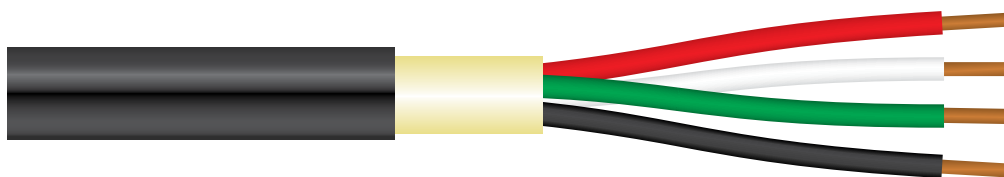

ewc01\_general\_01