


STW THERMOPLASTIC SERVICE CORD

- Conductor** Bare annealed copper ASTM B-174 flexible bunch strands
- Insulation** Colour coded PVC
- Jacket** Yellow or Black PVC
- Temperature** -40°C to +60°C
- Voltage** 600V
- Applications** Designed for outdoor use with portable tools, snow blowers, barbecues.
- Approvals** CSA C22.2 No. 49, UL-62
- Packaging** 75m & 300m spools.
- Colour Code** 3c -Black, White, Green 4C-Black, White, Red, Green
*Green Conductor used for grounding purposes only

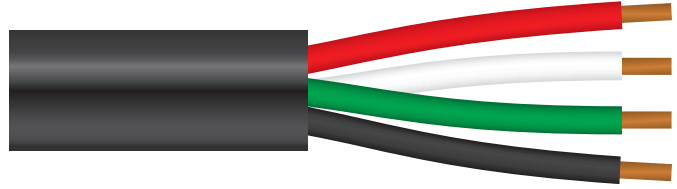

Product Code	Cond. Size	# of Cond.	Cond. Strand	Nom. Insul. Thickness (Inches)	Nom. Jacket Thickness (Inches)	Nom. O.D. (Inches)	AMPS*	Ship. Weight lbs/mft
13D1403	14	3	41	.045	.080	.530	18	138
13D1203	12	3	65	.048	.095	.605	25	193
13D1204	12	4	65	.045	.095	.650	20	232
13D1003	10	3	104	.050	.095	.670	30	274
13D1004	10	4	104	.050	.095	.750	25	337
13D0804	8	4	161	.060	.14	1.10	35	699

*Ampacities (Amps per conductor) are based on 30°C ambient temperature in air, 90°C conductor temperature.

