


# TYPE G OR G-GC ROUND PORTABLE POWER CABLE

**Conductor** Bare annealed copper flexible rope-lay stranded  
**Insulation** Colour coded synthetic rubber  
**Jacket** Extra hard usage black, oil and weather resistant CPE  
**Temperature** -40°C to +90°C  
**Voltage** 2000V

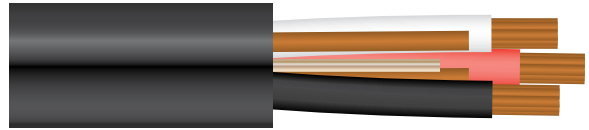

**Applications** Designed for use in mobile mining equipment, lifting magnets, conveyors, drills and pumps, as portable power and temporary power supply where equipment grounding is required.

**\*\*Approvals** UL, MSHA, CSA, RoHS Compliant

**Packaging** Long length Reels cut to length.

**Cabling** 3c Type G or GGC - Three conductors (Black, White, Red) are assembled round with two green insulated grounding conductors, one Yellow insulated ground check and solid elastomer filler as required. 4c Type G - Four conductors (Black, White, Red, Orange) are assembled round with four green insulated grounding conductors and solid elastomers as required.

**Reinforcement** An open reinforcement is applied over the assembly for mechanical strength.

Product Code	Cond. Size	# of Cond.	Yellow Ground AWG Size	Green Ground AWG Size	Cond. Strand	Nom. Insul. Thickness (Inches)	Nom. O.D. (Inches)	AMPS*	Ship. Weight lbs/mft
16B0803	8	3	10	2#10	133	0.06	0.965	65	600
16B0603	6	3	10	2#10	259	0.06	1.020	87	770
16B0403	4	3	10	2#8	259	0.06	1.125	114	1005
16B0203	2	3	10	2#7	259	0.08	1.315	152	1480
16B0103	1	3	8	2#6	259	0.08	1.445	177	1815
16B03	1/0	3	8	2#5	259	0.08	1.570	205	2205
16B003	2/0	3	8	2#4	259	0.08	1.660	237	2545
16B0003	3/0	3	8	2#3	259	0.08	1.810	274	3230
16B00003	4/0	3	8	2#2	259	0.08	1.920	316	3675
16B2503	250	3	8	2#2	627	0.095	2.390	352	6060
16B3503	350	3	8	2#1/0	855	0.095	2.680	433	7400
16B5003	500	3	8	2#1/0	1235	0.095	3.030	536	10,100
16B0804	8	4	-	4#12	133	0.06	1.125	52	650
16B0604	6	4	-	4#12	259	0.06	1.125	70	880
16B0404	4	4	-	4#10	259	0.06	1.225	91	1160
16B0204	2	4	-	4#9	259	0.06	1.435	122	1720
16B0104	1	4	-	4#8	259	0.08	1.595	142	2200
16B04	1/0	4	-	4#7	259	0.08	1.730	164	2705
16B004	2/0	4	-	4#6	259	0.08	1.855	190	3190
16B0004	3/0	4	-	4#5	259	0.08	2.040	219	4005
16B00004	4/0	4	-	4#4	259	0.08	2.145	253	4560

\*Ampacities (Amps per conductor) are based on 30°C ambient temperature in air, 90°C conductor temperature.

\*\*Contact your local branch for availability of CSA approved product.