


# 3 CONDUCTOR Teck 90 (XLPE) -40°C 15KV 100% [GROUNDED]

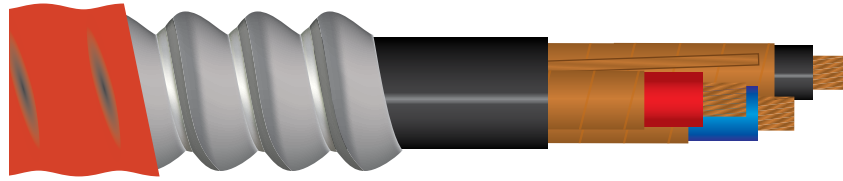

Product Code	AWG Size	Bonding AWG (Bare Copper)	Insulation Thickness		Inner Jacket Thickness		Inner Jacket Diameter		Armour Diameter		Outer Jacket Diameter		Weight Aluminum (Armoured)	
			Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	lbs/mft	kg/km
<b>20C0203</b>	2	6	0.0069	0.175	0.0032	0.08	1.806	45.86	2.156	54.76	2.29	58.17	2424	3607
<b>20C0103</b>	1	6	0.0069	0.175	0.0032	0.08	1.875	47.63	2.225	56.52	2.359	59.92	2673	3978
<b>20C03</b>	1/0	6	0.0069	0.175	0.0032	0.08	1.955	49.67	2.305	58.55	2.479	62.97	2972	4423
<b>20C003</b>	2/0	6	0.0069	0.175	0.0044	0.11	2.104	53.44	2.454	62.33	2.588	65.74	3545	5275
<b>20C0003</b>	3/0	4	0.0069	0.175	0.0044	0.11	2.206	56.03	2.556	64.92	2.69	68.33	4054	6032
<b>20C00003</b>	4/0	4	0.0069	0.175	0.0044	0.11	2.319	58.9	2.669	67.79	2.803	71.2	4615	6868
<b>20C2503</b>	250	4	0.0069	0.175	0.0044	0.11	2.441	62.01	2.791	70.89	2.925	74.3	5154	7670
<b>20C3003</b>	300	4	0.0069	0.175	0.0044	0.11	2.55	64.77	2.9	73.66	3.034	77.06	5768	8584
<b>20C3503</b>	350	3	0.0069	0.175	0.0044	0.11	2.702	68.62	3.052	77.52	3.186	80.92	6512	9691
<b>20C4003</b>	400	3	0.0069	0.175	0.0044	0.11	2.795	70.99	3.145	79.88	3.279	83.29	7119	10594
<b>20C5003</b>	500	3	0.0069	0.175	0.0044	0.11	2.962	75.24	3.312	84.12	3.446	87.53	8354	12432