


# MULTI-PAIR (FOIL & BRAID SHIELDED)

## CSA/FT4/UL

- Conductor** Stranded tinned copper
- Insulation** Colour coded semi-rigid PVC
- Jacket** Grey PVC
- Temperature** -20C to +105C
- Shield** Overall 100% aluminum foil with stranded tinned copper drain wire & 85% tinned copper braid.
- Approvals** CSA certified CMG or CM to harmonized standard C22.2 No. 214 and UL 44. Certified to CSA standard C22.2 No. 210.2 - Type AWM. UL listed CL2 per standard UL13
- Applications** For PA systems, unbalanced intercom systems, interconnecting cables remote control circuits, telephones and low voltage relay control cables.

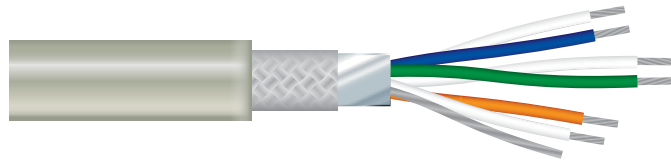

Product Code	Cond. Size	# of Pairs	Cond. Strand	Drn Wir Size	Nom. Insul. Thick. (Inchs)	Nom. Jackt Thick. (Inchs)	Sgstd Wrkn Vltge	Nom. O.D. (Inchs)	Colour Code	Nom. Cap pF/tt		Ship. Wght Lbs/ Mft
										A	B	
35G2402	24	2	7x32	24	.010	.030	600	.255	3	30	50	33
35G2403	24	3	7x32	24	.010	.030	600	.270	3	30	50	41
35G2404	24	4	7x32	24	.010	.030	600	.290	3	30	50	44
35G2406	24	6	7x32	24	.010	.030	600	.315	3	30	50	60
35G2409	24	9	7x32	24	.010	.030	600	.354	3	30	50	77
35G24125	24	12.5	7x32	24	.010	.030	600	.385	3*	30	50	99
35G2202	22	2	7x30	22	.010	.030	600	.256	3	35	63	40
35G2203	22	3	7x30	22	.010	.030	600	.270	3	35	63	50
35G2204	22	4	7x30	22	.010	.030	600	.292	3	35	63	60
35G2206	22	6	7x30	22	.010	.030	600	.327	3	35	63	70
35G2209	22	9	7x30	22	.010	.030	600	.376	3	35	63	95
35G2212	22	12	7x30	22	.010	.030	600	.410	3	35	63	119

A - Conductor to conductor B - 1 Conductor and other conductors connected to shield

\* - Single conductor Black