


# FAS FIRE ALARM CABLE FOIL SHIELD

- Conductor** Solid bare copper
- Insulation** 300V Colour coded PVC
- Jacket** Red PVC
- Temperature** -30°C bend to 105°C
- Shield** Aluminum polyester shield with 22 AWG stranded tinned copper drain wire
- Packaging** X 75, X 150, X 300m Spools
- Approvals** CSA C22.2 No. 208 Type FAS FT4, SR (Sunlight Resistant)
- Applications** Fire alarm systems, heating, air conditioning and thermostat controls. For use in buildings in damp or dry locations. Power circuits in accordance with NEC article 725 Class 2 and 3 circuits. Suitable for tray cable installations.



Product Code	Cond Size	# of Cond.	Cond. Strand	Nominal Insulation Thickness (inches)	Nominal Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (kgs/km)	Colour Code
39EE1802	18	2	Solid	.015	.035	.216	41	92
39EE1803	18	3	Solid	.015	.035	.229	51	92
39EE1804	18	4	Solid	.015	.035	.247	64	92
39EE1805	18	5	Solid	.015	.036	.268	75	92
39EE1602	16	2	Solid	.015	.035	.237	52	92
39EE1603	16	3	Solid	.015	.035	.250	68	92
39EE1604	16	4	Solid	.015	.035	.281	85	92
39EE1605	16	5	Solid	.015	.039	.309	103	92
39EE1402	14	2	Solid	.015	.035	.263	70	92
39EE1404	14	4	Solid	.015	.037	.311	120	92
39EE1202	12	2	Solid	.015	.037	.316	98	92

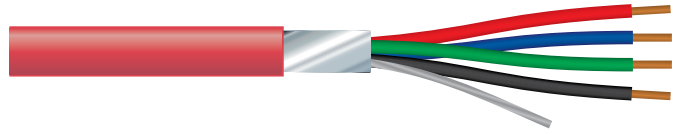