



3 CONDUCTOR TECK 90 (XLPE) -40°C 5KV UNSHIELDED 100%

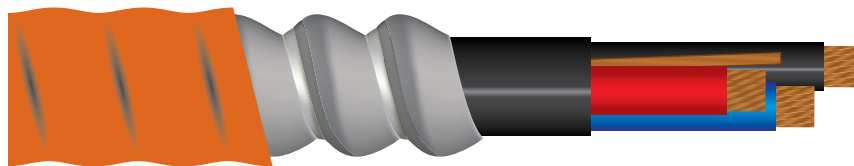

| Product Code | AWG Size | Bonding AWG (Bare Copper) | Insulation Thickness | | Inner Jacket Thickness | | Inner Jacket Diameter | | Armour Diameter | | Outer Jacket Diameter | | Weight Aluminum (Armoured) | |
|--------------|----------|---------------------------|----------------------|------|------------------------|------|-----------------------|-------|-----------------|-------|-----------------------|-------|----------------------------|-------|
| | | | Inches | mm | Inches | mm | Inches | mm | Inches | mm | Inches | mm | lbs/mft | kg/km |
| 20A0603 | 6 | 8 | 0.09 | 2.29 | 0.08 | 2.04 | 1.051 | 26.69 | 1.326 | 33.68 | 1.435 | 36.45 | 872 | 1298 |
| 20A0403 | 4 | 8 | 0.09 | 2.29 | 0.08 | 2.04 | 1.146 | 29.11 | 1.421 | 36.09 | 1.53 | 38.86 | 1155 | 1638 |
| 20A0203 | 2 | 6 | 0.09 | 2.29 | 0.08 | 2.04 | 1.266 | 32.15 | 1.541 | 39.14 | 1.67 | 42.42 | 1503 | 2134 |
| 20A0103 | 1 | 6 | 0.09 | 2.29 | 0.08 | 2.04 | 1.335 | 33.91 | 1.61 | 40.89 | 1.739 | 44.17 | 1732 | 2438 |
| 20A03 | 1/0 | 6 | 0.09 | 2.29 | 0.08 | 2.04 | 1.415 | 35.95 | 1.69 | 42.93 | 1.819 | 46.2 | 2013 | 2864 |
| 20A003 | 2/0 | 6 | 0.09 | 2.29 | 0.08 | 2.04 | 1.5 | 38.1 | 1.775 | 45.09 | 1.904 | 48.36 | 2339 | 3327 |
| 20A0003 | 3/0 | 4 | 0.09 | 2.29 | 0.08 | 2.04 | 1.606 | 40.8 | 1.956 | 49.68 | 2.09 | 53.09 | 2929 | 4107 |
| 20A00003 | 4/0 | 4 | 0.09 | 2.29 | 0.08 | 2.04 | 1.724 | 43.79 | 2.074 | 52.68 | 2.208 | 56.08 | 3544 | 4828 |
| 20A2503 | 250 | 4 | 0.09 | 2.29 | 0.011 | 2.80 | 1.882 | 47.8 | 2.232 | 56.69 | 2.366 | 60.1 | 4032 | 5676 |
| 20A3503 | 350 | 3 | 0.09 | 2.29 | 0.011 | 2.80 | 2.094 | 53.19 | 2.444 | 62.08 | 2.578 | 65.48 | 5242 | 7424 |
| 20A5003 | 500 | 3 | 0.09 | 2.29 | 0.011 | 2.80 | 2.355 | 59.81 | 2.705 | 68.71 | 2.839 | 72.11 | 7053 | 9798 |
| 20A7503 | 750 | 2 | 0.09 | 2.29 | 0.011 | 2.80 | 2.914 | 74.01 | 3.164 | 80.36 | 3.318 | 84.28 | 9712 | 14453 |

3 CONDUCTOR TECK 90 (XLPE) -40°C 5KV SHIELDED 100% & 133%

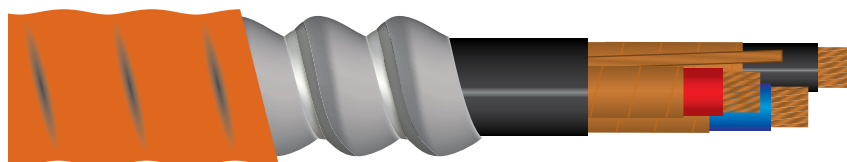

| Product Code | AWG Size | Bonding AWG (Bare Copper) | Insulation Thickness | | Inner Jacket Thickness | | Inner Jacket Diameter | | Armour Diameter | | Outer Jacket Diameter | | Weight Aluminum (Armoured) | |
|--------------|----------|---------------------------|----------------------|------|------------------------|------|-----------------------|-------|-----------------|-------|-----------------------|-------|----------------------------|-------|
| | | | Inches | mm | Inches | mm | Inches | mm | Inches | mm | Inches | mm | lbs/mft | kg/km |
| 20B0603 | 6 | 8 | 0.09 | 2.29 | 0.08 | 2.04 | 1.225 | 31.12 | 1.5 | 38.1 | 1.609 | 40.87 | 1165 | 1734 |
| 20B0403 | 4 | 8 | 0.09 | 2.29 | 0.08 | 2.04 | 1.321 | 33.55 | 1.596 | 40.54 | 1.725 | 43.82 | 1397 | 2078 |
| 20B0103 | 1 | 6 | 0.09 | 2.29 | 0.08 | 2.04 | 1.51 | 38.35 | 1.83 | 46.48 | 1.994 | 50.63 | 2029 | 3019 |
| 20B03 | 1/0 | 6 | 0.09 | 2.29 | 0.08 | 2.04 | 1.594 | 40.49 | 1.944 | 49.38 | 2.078 | 52.78 | 2443 | 3635 |
| 20B003 | 2/0 | 6 | 0.09 | 2.29 | 0.08 | 2.04 | 1.679 | 42.64 | 2.029 | 51.54 | 2.163 | 54.94 | 2790 | 4152 |
| 20B0003 | 3/0 | 4 | 0.09 | 2.29 | 0.011 | 2.80 | 1.846 | 46.88 | 2.196 | 55.79 | 2.33 | 59.18 | 3411 | 5076 |
| 20B00003 | 4/0 | 4 | 0.09 | 2.29 | 0.011 | 2.80 | 1.959 | 49.75 | 2.309 | 58.65 | 2.443 | 62.05 | 3948 | 5875 |
| 20B2503 | 250 | 4 | 0.09 | 2.29 | 0.011 | 2.80 | 2.085 | 52.96 | 2.435 | 61.85 | 2.569 | 65.25 | 4531 | 6742 |
| 20B3503 | 350 | 3 | 0.09 | 2.29 | 0.011 | 2.80 | 2.294 | 58.26 | 2.644 | 67.16 | 2.778 | 70.56 | 5752 | 8559 |
| 20B5003 | 500 | 3 | 0.09 | 2.29 | 0.011 | 2.80 | 2.554 | 64.87 | 2.904 | 73.76 | 3.038 | 77.17 | 7476 | 11125 |