


Dual Category 5E Aluminum Armoured

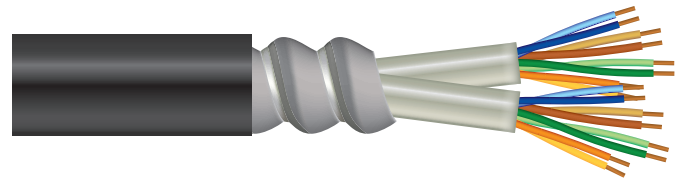

Insulation Colours
 Pair 1: ColorTip Light Blue, Blue
 Pair 2: ColorTip Light Orange, Orange
 Pair 3: ColorTip Light Green, Green
 Pair 4: ColorTip Light Brown, Brown

Jacket Inner and outer PVC jacket

Armour Aluminum Interlocked Armour

Temperature -40°C to 75°C

Approvals CEC C(UL) Type CM
 TIA/EIA 568.B.2 CAT 5e
 Datatwist 350 spec

Applications 100 Base TX, 100 Base VG ANYLAN, and 155 ATM, use in high bandwidth existing or future applications such as 622 ATM and gigabit ethernet
 Sunlight and oil resistant

Product Code	AWG Size	Pairs	Strand & Cond.	Insul. Mat'l. & Dia. (in.)	Nom. OD (in)	Nom. Vel. of Prop.	Nom. Cap. (pF/ft)	Rating	Cable Weight (lbs/mft)	Jacket Colours
36121702A	24	4 (x 2)	Solid BC	PO	0.610	70%	14.0	CSA/FT4	124	Black or Blue

CAT5E_AA_DC.pdf