


CCTV Cable

RG-6

Conductor	Bare copper
Jacket	Overall PVC
Max. Voltage	300V
Nominal Impedance	75 ohms
Approvals	EU CMG FT4
Applications	CCTV plus audio, pan and tilt CCTV control

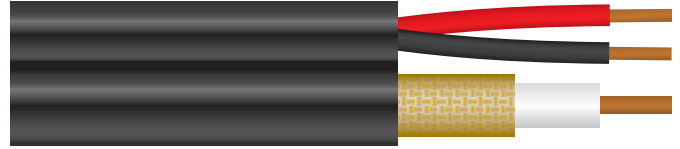

Product Code	AWG Size	Strand & Cond.	Shield/ Coverage	Insulation Material	Insulation Nominal OD		Nominal OD		Nom. Cap. (pF/ft)	Cable Weight (lbs/mft)	Nominal Attenuation	
					in	mm	In	mm			mHz	Db/100ft
35561802	18 (CX)	Solid BC	95% BCB	FPE	.180	4.57	.266	6.76	16.3	69	50	1.5
							X	X			100	2.1
	18 (1 PR)	7/w BC	Unshielded	PP	.066	1.68	.500	12.70	21.5		200	3.1
							400	4.5				
							700	5.9				
1000	7.3											

Twisted Pair Colours: Black & Red