


Direct Burial Station Z

- Conductor** Solid bare copper
- Insulation** 300V Colour coded semi-rigid PVC
- Jacket** Black high density Polyethylene
- Temperature** -40°C to 80°C
- Applications** For use as a direct burial drop wire, service or entrance cable.

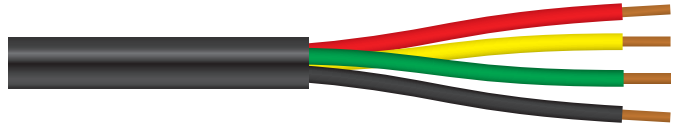

Product Code	AWG Size	# of Cond.	Stranding	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (lbs/mft)	Colour Code
35KB2204	22	4	Solid	0.007	0.020	0.139	43	BLK/RED/YEL/GRN

DB_STN_Z.pdf