


FAS Fire Alarm Cable Armoured Foil Shield

- Conductor** Solid bare copper
- Inner Jacket** Red PVC
- Shield** Aluminum polyester shield with 22 AWG stranded tinned copper drain wire
- Armour** Aluminum interlocked
- Temperature** -30°C bend to 105°C
- Packaging** X 75, X 150, X 300m Spools
- Approvals** CSA C22.2 No. 208 Type FAS FT4, SR (Sunlight Resistant)
- Applications** Designed for use in the interconnection of security system elements; including fire protective signaling devices such as smoke detectors, fire alarms and two way emergency communication systems.

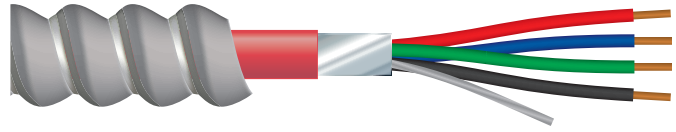

Product Code	AWG Size	# of Cond.	Cond. Strand	Nominal Insulation Thickness (inches)	Nominal Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (kgs/km)	Colour Code
39EC1803	18	3	Solid	.015	.035	.397	107	92
39EC1805	18	5	Solid	.015	.035	.437	139	92
39EC1603	16	3	Solid	.015	.035	.445	140	92
39EC1605	16	5	Solid	.015	.039	.494	185	92

Colours: Also available with red tint, please add -20 to Product Code

Chart No. 92 Fire Alarm

Cond. #	Colour	Cond. #	Colour	Cond. #	Colour
1	Black	11	Red/Black	21	White/Blue
2	Red	12	Green/Black	22	Red/Blue
3	Green	13	Yellow/Black	23	Yellow/Blue
4	Blue	14	Green/Yellow	24	Brown/Blue
5	Brown	15	Yellow/Red	25	Black/Red
6	Orange	16	White/Orange	26	White/Brown
7	Black/White	17	Black/Orange	27	Green/Brown
8	Red/White	18	Red/Orange	28	Yellow/Brown
9	Green/White	19	Green/Orange	29	White/Red
10	Yellow/White	20	Brown/Orange	30	Brown/Red

***Note:** In cable constructions containing more than 25 pair, the colours are repeated as necessary. Colour coded binders are used to identify 25 pair groups of colour coded pairs.

FAS_FAC_AFS.pdf