


# MULTI-PAIR STRANDED INDIVIDUAL & OVERALL FOIL SHIELD

CSA/FT4/UL

- Conductor** Stranded tinned copper
- Insulation** 600V Colour coded Polyethylene
- Jacket** Grey PVC
- Temperature** -20°C to 80°C
- Shield** Individual & overall 100% aluminum foil/polyester shield with stranded tinned copper drain wire for each pair.
- Approvals** CSA Certified CMG or to CM harmonized standard C22.2 No.214 and UL 444  
Certified to CSA standard C22.2 No. 210.2 – Type AWM  
UL listed CL2 per standard UL13
- Applications** For use in recording studios and broadcast sound systems. Requires up to 2/3 less space than standard broadcast cables.

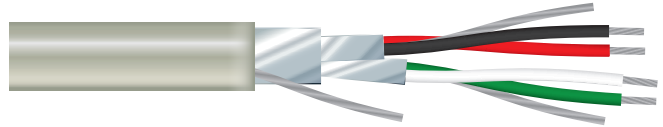

Product Code	AWG Size	# of Pairs	Stranding	Drain Wire Size	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Nominal Cap. (pF/ft)		Cable Weight (lbs/mft)	Colour Code
								A	B		
35I2202U	22	2	7/30	24	0.010	0.023	0.185	25	50	23	8

**A** – Conductor to conductor    **B** – 1 Conductor and other conductors connected to shield

## Chart No. 8 Paired

Pair #	Colour
1	Black/Red
2	Green/White
3	Yellow/Orange
4	Blue/Brown
5	Purple/Grey
6	Pink/Tan

MP\_SIO\_FS.pdf