


Multi-Pair Stranded Unshielded

CSA/FT4/UL

- Conductor** Stranded tinned copper
- Insulation** 600V Colour coded semi-rigid PVC
- Jacket** Grey PVC
- Temperature** -20°C to 105°C
- Approvals** CSA Certified CMG/UL listed to CM harmonized standard C22.2 No.214 and UL 444.
Certified to CSA standard C22.2 No. 210.2 – Type AWM
Passes CSA/FT4 vertical flame test
Passes UL 70,000 BTU vertical flame test

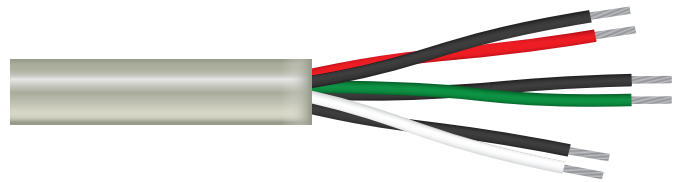

Applications For use in PA systems, unbalanced intercom systems, interconnecting cables, remote control circuits, telephones and low voltage relay controls.

Product Code	AWG Size	# of Pairs	Stranding	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (lbs/mft)	Colour Code
35CB2202	22	2	7/30	0.008	0.023	0.202	20	3
35CB2204	22	4	7/30	0.008	0.023	0.236	33	3
35CB2209	22	9	7/30	0.008	0.030	0.331	69	3
35CB2212	22	12	7/30	0.008	0.030	0.364	89	3
35CB2219	22	19	7/30	0.008	0.030	0.438	133	3
35CB2227	22	27	7/30	0.008	0.032	0.530	187	3
35CB2002	20	2	7/28	0.009	0.023	0.235	27	3
35CB2004	20	4	7/28	0.009	0.023	0.276	47	3
35CB2012	20	12	7/28	0.009	0.030	0.428	130	3
35CB2015	20	15	7/28	0.009	0.032	0.470	160	3
35CB1802	18	2	16/30	0.012	0.023	0.285	38	3
35CB1804	18	4	16/30	0.012	0.030	0.351	71	3
35CB1806	18	6	16/30	0.012	0.030	0.402	101	3
35CB1812	18	12	16/30	0.012	0.032	0.530	189	3
35CB1815	18	15	16/30	0.012	0.050	0.614	252	3
35CB1603	16	3	26/30	0.015	0.030	0.386	84	3
35CB1606	16	6	26/30	0.015	0.032	0.497	156	3

Chart No. 3 Paired

Pair #	Colour	Pair #	Colour	Pair #	Colour
1	Black & Red	11	Red & Yellow	21	White & Brown
2	Black & White	12	Red & Brown	22	White & Orange
3	Black & Green	13	Red & Orange	23	Blue & Yellow
4	Black & Blue	14	Green & White	24	Blue & Brown
5	Black & Yellow	15	Green & Blue	25	Blue & Orange
6	Black & Brown	16	Green & Yellow	26	Brown & Yellow
7	Black & Orange	17	Green & Brown	27	Brown & Orange
8	Red & White	18	Green & Orange	28	Orange & Yellow
9	Red & Green	19	White & Blue	29	Purple & Orange
10	Red & Blue	20	White & Yellow	30	Purple & Red

***Note:** In cable constructions containing more than 25 pair, the colours are repeated as necessary. Colour coded binders are used to identify 25 pair groups of colour coded pairs.

MP_SU.pdf